

ELECTRONIC SOLUTIONS FOR ADVERTISING MEDIA



VIDEO WALL

NEW DIMENSION
 FOR MEGA PERFORMANCE

TECHNICAL DATA

Scope of supply: Slim bezel 42" monitor with remote control.

+ GENERAL DATA

Model
 Resolution (HxW) & LCD Panel
 Luminance
 Contrast Ratio
 Viewing Angle
 Response Time
 Dimensions (WxHxD)

- ❑ **WOS NM42F09-S Full HD**
- ❑ 1920x1080
- ❑ 700 cd/m²
- ❑ 1500:1
- ❑ 178°
- ❑ 6.5 ms
- ❑ 962.5x555.4x143.3mm

Temperature
 Humidity
 Power
 Power Consumption
 Net Weight
 Compliances & Certifications

- ❑ Operating: 0 to 40°C, Storage: -20 to 60°C
- ❑ Operating: 20-5% RH, Storage: 5-85% RH
- ❑ IEC connector for direct AC connection
- ❑ 90-264 WVAC, 50/60 Hz, 294 W
- ❑ 33 KG
- ❑ FCC, CSA, CE

+ DISPLAY INPUT FORMATS

PC Timing
 Video Timing
 Video Input

- ❑ Up to 1920x1080
- ❑ 480i/p, 576i/p, 720p, 1080i/p
- ❑ HDMI/HDCP, YPbPr, S-Video, Composite, Sync-On-Green (SOG)

+ IN+OUTPUTS


Video Input
 Graphics Input
 Video Output
 Graphics Output
 Audio

- ❑ HDMI/HDCP, YPbPr (BNC), S-Video (DIN-4), Composite (BNC), Sync-On-Green (SOG) (BNC)
- ❑ VGA (D-Sub 15), DVI (via HDMI)
- ❑ HDMI/HDCP, YPbPr (BNC), S-Video (DIN-4), Composite (BNC), Sync-On-Green (SOG) (BNC)
- ❑ VGA (D-Sub 15)
- ❑ Line In, Speaker Out, Speakers (optional)



Slim bezel design

INSTALLATION POSSIBILITIES

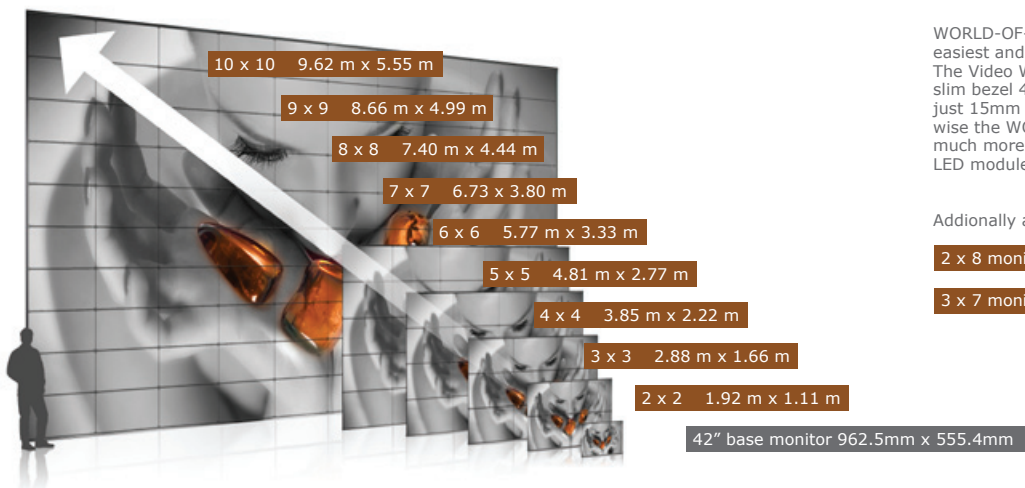

WORLD-OF-SCREENS Video Walls are the most easiest and economic way to build a Video Wall. The Video Walls are created from our special slim bezel 42" monitors WOS NM42F09-S with just 15mm frame thickness. Price/Performance wise the WORLD-OF-SCREENS Video Walls are much more effective than frameless PDP or LED modules. The video format is 16:9.

Additionally available in portait format:

2 x 8 monitors at 1.92 x 4.99 m

3 x 7 monitors at 2.88 x 3.80 m